
pharobit







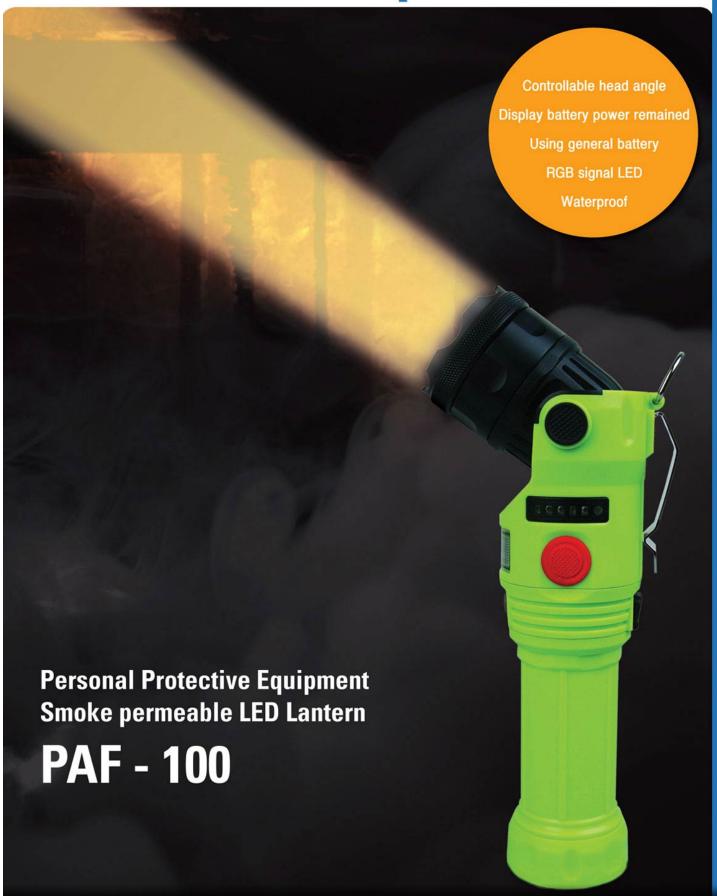

| No. | Item | Contents |
|-----|-------------------------------|--|
| 1 | Power LED | - 10W LED - 1000Lm , Smoke Fluoroscopy, Max Illumination distance 400m - Brightness mode : HI , MIDDLE, LOW, SOS, STROBE |
| 2 | 3 Color Signal LED | - RED, GREEN, BLUE |
| 3 | Laser Pointer | - 5mW Red Color Laser Pointer |
| 4 | Display battery remaining LED | - 5 Steps |
| 5 | Rescue Safety Mode | - Siren & LED lighting once not to sense vibration of device for 15 seconds - Display Safety Mode ON & OFF in LED |
| 6 | Head Angle Control | To control the angle from 75° ~ 180° |
| 7 | Detachable Clip | Detachable clip & ring |
| 8 | Power | Rechargeable Li-Ion battery(PCM circuit inside 3.7V 2800mAh 18650D2pcs Safety circuit inside protecting overcharging Compensation charge inside Run time: 3Hr ~28Hr |
| 9 | Smoke filter | - Smoke filter(Yellow-Amber , 620nm) - Window breaker combined |
| 10 | Housing | - Head, Window breaker: Aircraft Aluminum 6061 T6, Hard Anodizing - Body: High impact plastic for shock resist and heat resist |
| 11 | Waterproof | - IP65 |
| 12 | Size / Weight | - 90°: 222 x 66 (Max Diameter) - 180°: 236 x 66 (Max Diameter) - 510g (Including Batteries) |







pharobit

Personal Protective Equipment Smoke Permeable LED Lantern PAF-100

- Safety circuit built-in high capacity battery(2600mA 18650 x 2pcs)
 - Min. 3Hr (Brightness 100%)
 - Max. 28Hr (Brightness 10%)
- RGB Color Signal LED (Red, Green, Blue)
- Laser Pointer (5mW Red color)
- Display remained battery power with 5 steps
- Controllable head angle
- Military Standard materials
 - Head, Filter, Hammer: Aircraft Aluminum 6061 T6, Hard Anodizing
 - Body: High impact plastic for shock resist and heat resist

CREE 10W LED



Smoke Permeable Filter



Personal Safety Mode







pharobit

Laser Pointer



► Military Standard Materials



Adjustable Head Angle



► Hammer for Window Breaking



► RGB color Signal LED



► Charging Adapter





